


Two-shell demolition grabs



Excavator weight class (t): 1-2 Capacity (l): 45 Operating pressure (bar): 250 grabbing / 250 slewing Clamping force (kN): 13

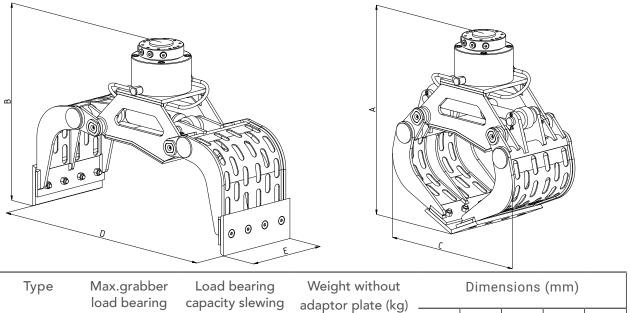

	Туре	Max.grabber load bearing	Load bearing capacity slewing	Weight without adaptor plate (kg)	Dimensions (mm)				
		capacity (t)	gear max. (t)		А	В	С	D	Е
_	DG05	1	5	160	770	710	660	1030	360



Connections at the front

Continuously rotatable hydraulic slewing gear

Flat, compact design - Grab hydraulic lines and synchronized control run protected in the arm

0

Lubrication points easy to access

.

Shells made of highstrength fine-grain steel (450 HB)

Bolted reversing exchangeable cutting edge made of highstrength fine-grain steel (450 HB)



Multi-use grab for a wide range of set of handling different materials such as demolition, sorting scrap, loading and sorting and recycled materials.