


Two-shell demolition grabs




Excavator weight class (t): 9-15 Capacity (l): 400 Operating pressure (bar): 350 grabbing / 250 slewing Clamping force (kN): 50

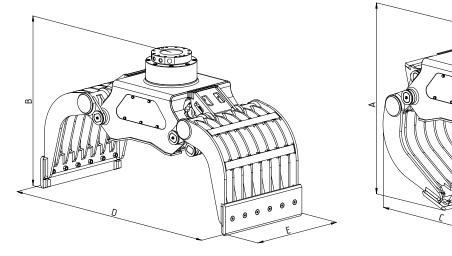

| Туре | Max.grabber load bearing capacity (t) | Load bear- ing capacity rotary motor max. (t) | Weight without adaptor plate (kg) | Dimensions (mm) | | | | |
|-------------|---|--|--------------------------------------|-----------------|------|------|------|-----|
| | | | | А | В | С | D | E |
| DG3.3-800-R | 4 | 15 | 942 | 1258 | 1293 | 1200 | 1930 | 800 |



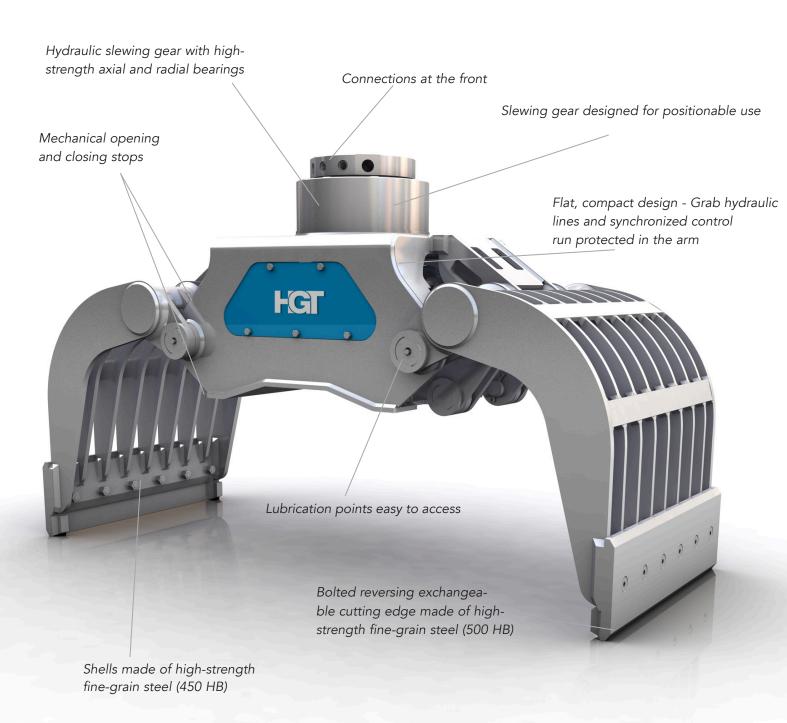



Multi-use grab for a wide range of set of handling different materials such as demolition, sorting scrap, loading and sorting and recycled materials.