





## Hydraulic slewing gear


## DWP26

Weight (kg): 260 max. axial static load bearing capacity (t): 26 max. axial dynamic load bearing capacity (t): 15.5 Torque (140bar) (Nm): 4600 Speed max. (rpm): 15 Operating pressure max. (bar): 350 Rotating union / 140 Rotary function

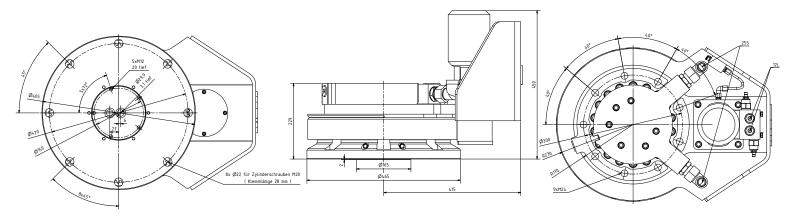



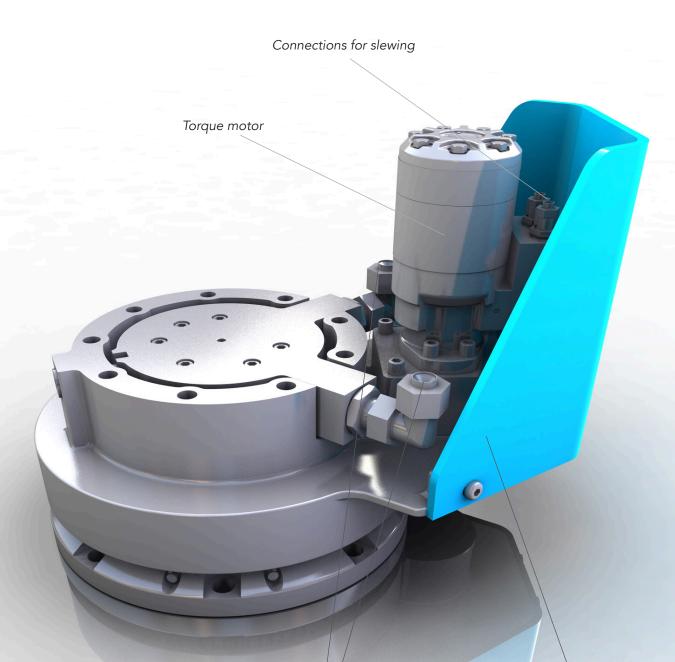



Hose protection plate for the hydraulic connections on the slewing gear



The DWP-26 slewing gear has been designed for use on hydraulic attachments for hydraulic excavators, as well as for mobile and stationary handling machines. The DWP-26 takes over three functions for the operation of the attachment:

- 1. Endless hydraulic rotary drive
- 2. Hydraulic rotary union
- 3. axial as well as radial support of the attachment in rotary operation