




Two-shell universal grabs

MP3.3

Excavator weight class (t): 9-15 Capacity (I): 360


Operating pressure (bar): 350 grabbing / 250 slewing Clamping force (kN): 55

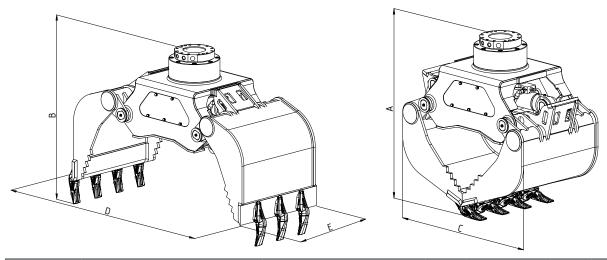

Туре	Max.grabber load bearing capacity (t)	Load bear- ing capacity rotary motor max. (t)	Weight with- out adapter plate (kg)	Number of teeth		Dimensions (mm)				
					Α	В	С	D	Е	
MP3.3-800	4	15	938	7	1258	1293	1200	1930	800	



Date 05/2022 - Rev.: JR -Technical changes reserved

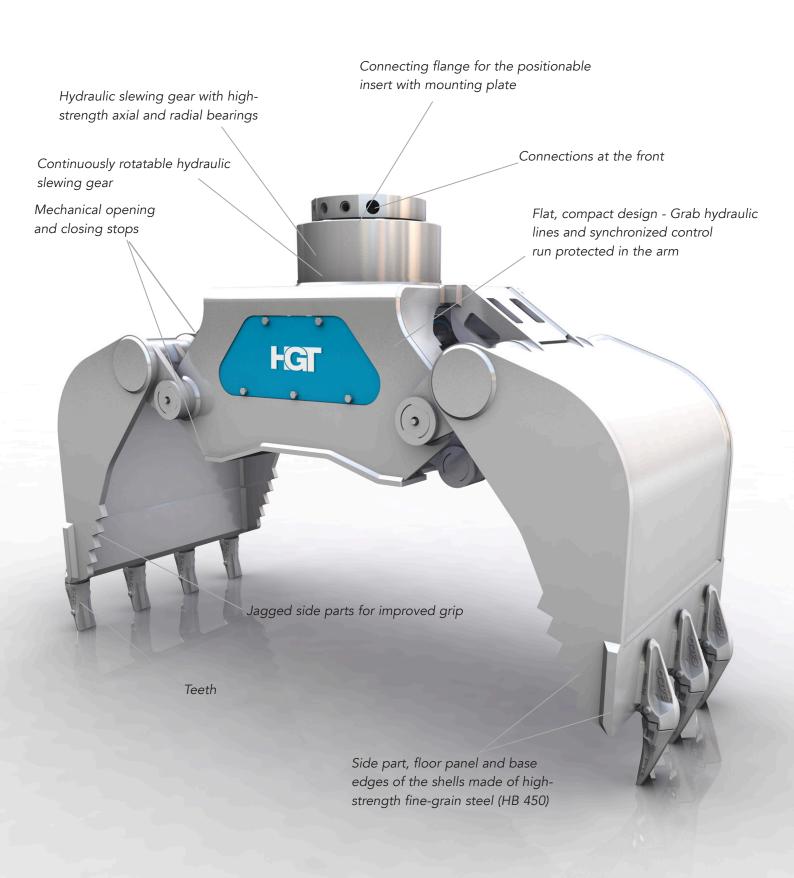



Multi-use grab for a wide range of applications for handling different materials such as stone-setting tasks, sorting construction scrap, loading and sorting recycling materials, earth excavation and loading course bulk goods, loading bushes and shrubs.