

Series RCS and RGF



Two-shell loading grab

RCS5.6

Excavator weight class (t): 30-60



Load bearing capacity (t): Grab: 8 / Slewing gear: 15

Operating pressure (bar): 350 grabbing / 140 slewing


Bulk weight up to (t/m³): 2.0-2.6


Closing force max. (kN): 105

Speed max. (rpm): 15

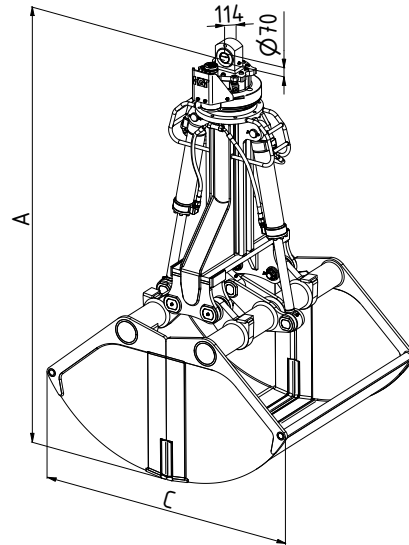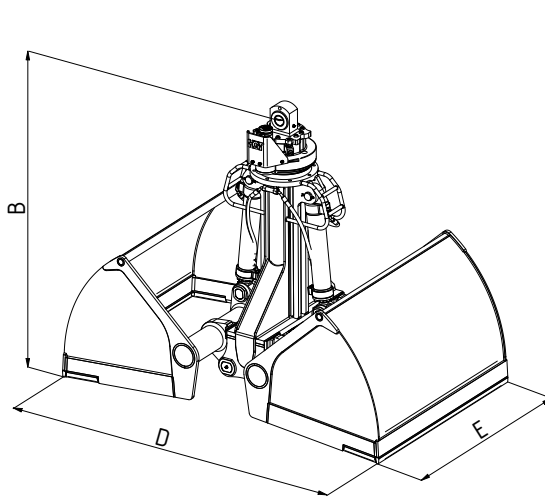

Type	Capacity - SAE (l)	Bulk weight (t/m ³)	Weight (kg)	Dimensions (mm)				
				A	B	C	D	E
RCS5.6-1500	1500	2.6	2045	2908	1990	1979	2624	1200
RCS5.6-2000	2000	2.6	2220	2908	1990	1979	2624	1600
RCS5.6-2500	2500	2.0	2395	2908	1990	1979	2624	2000

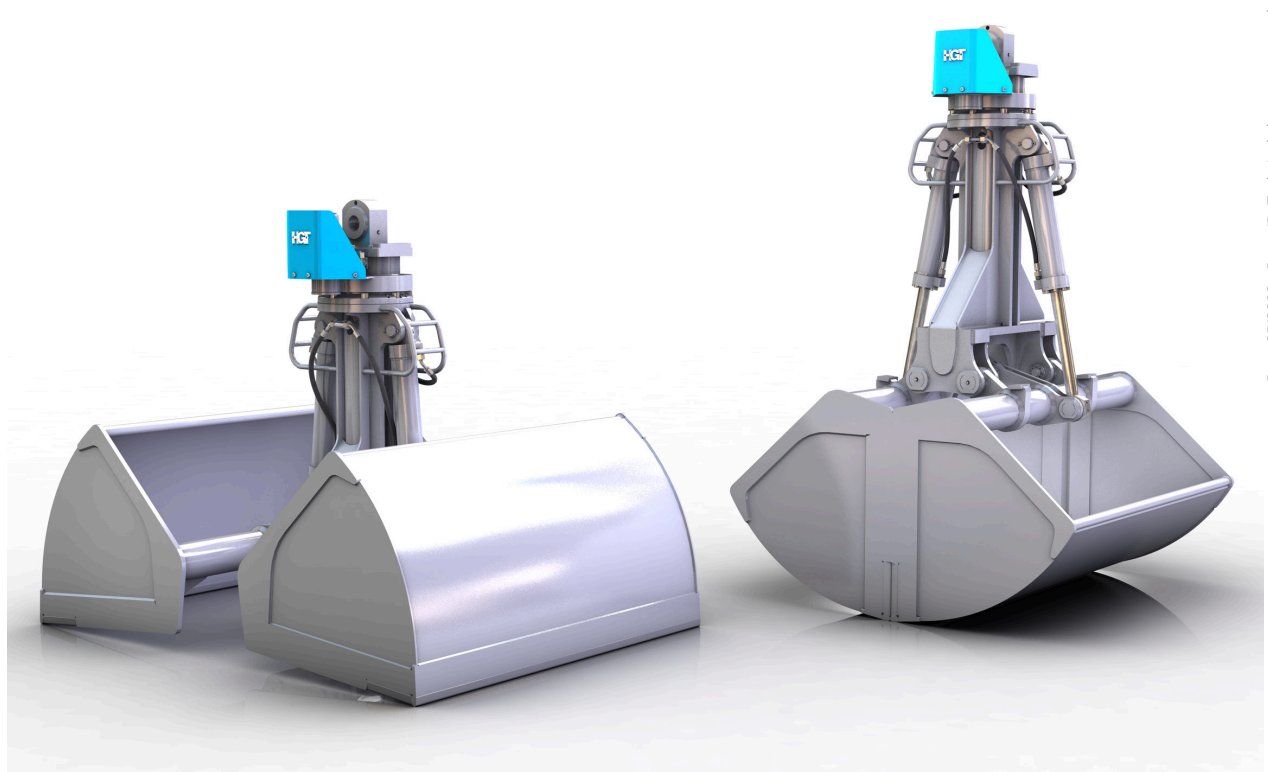

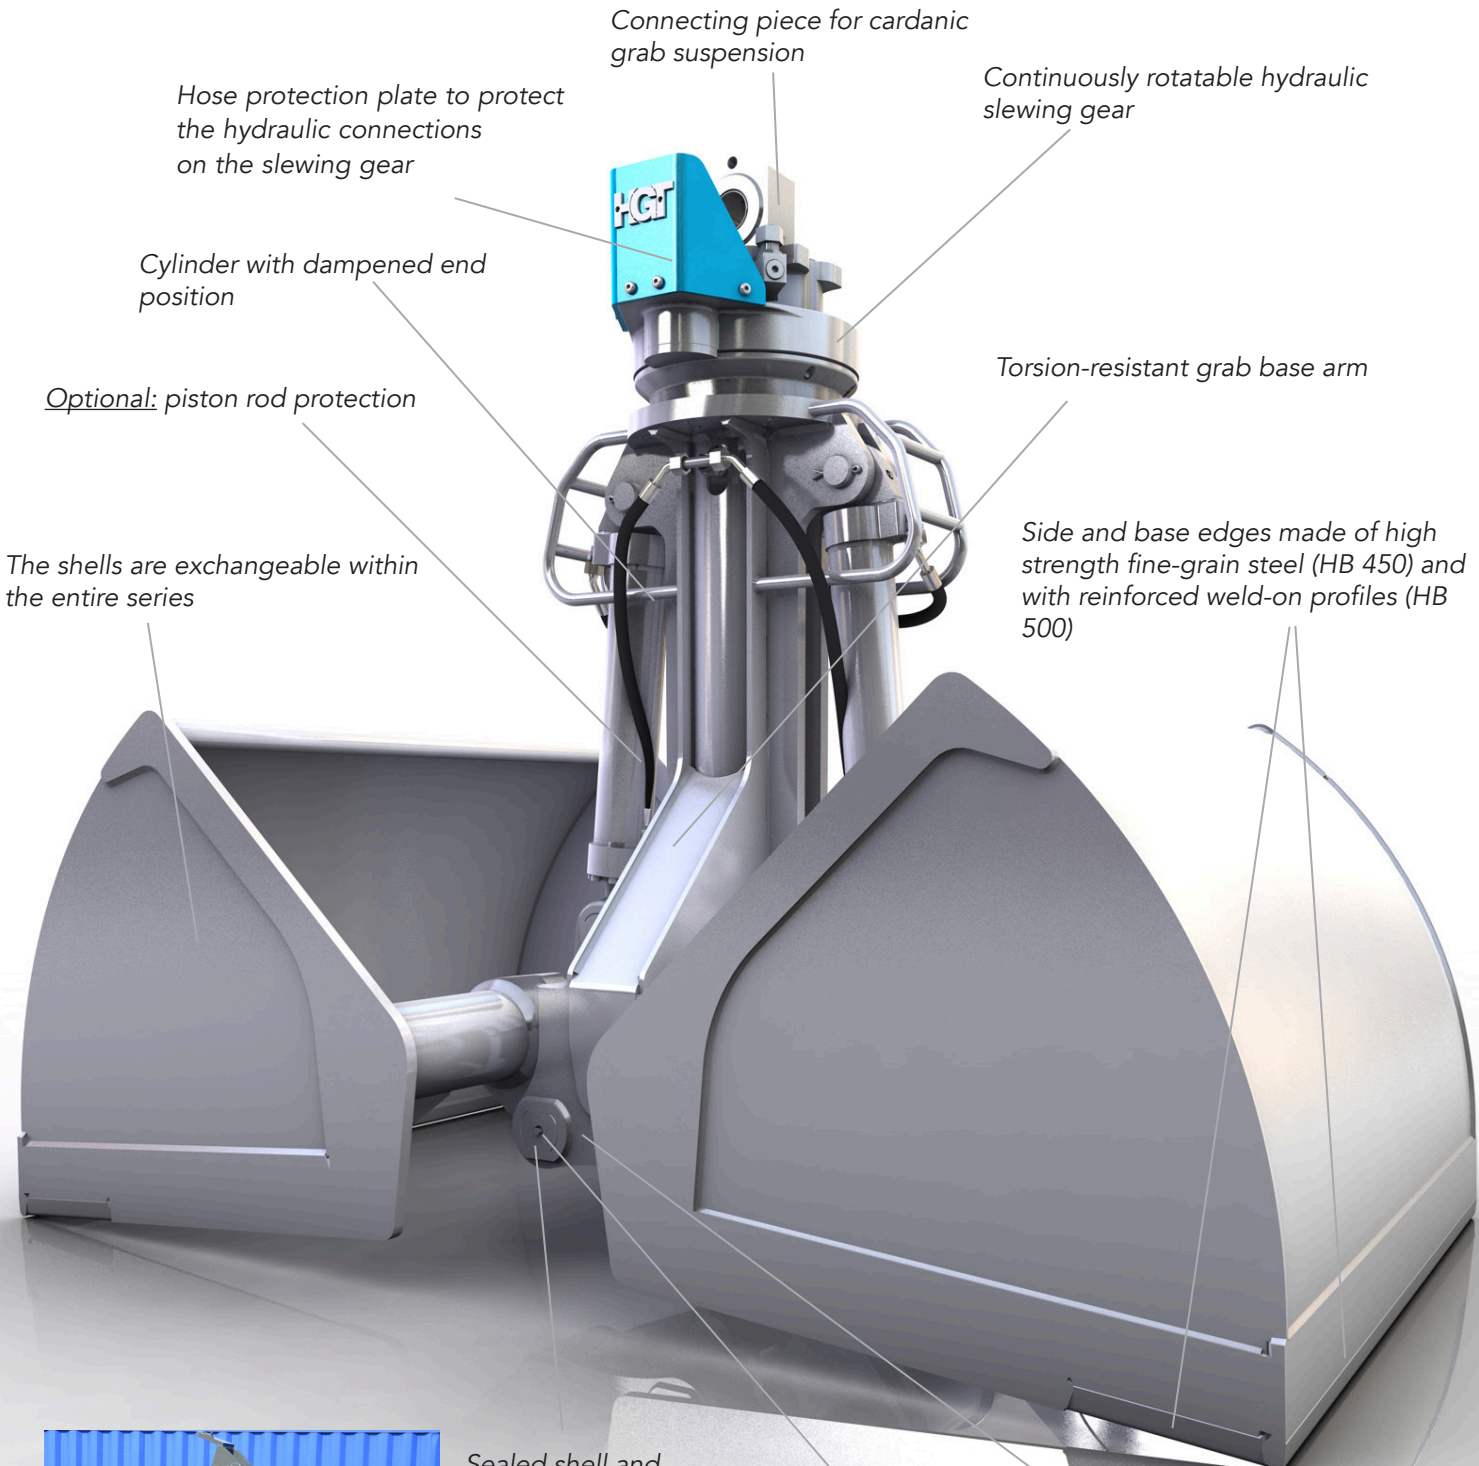

Sealed shell and synchronised joint

Lubrication points easy to access

Synchronized control run



Optimized grabs for the transfer of bulk materials such as gravel, sand, pebbles, grain, feed, fertilizer, ore, coal, etc.