

Baureihe RCS und RGF



Zweischalengreifer-Verladegreifer

RCS5.6





Baggergewichtsklasse (t): 30-60
Tragfähigkeit (t): Greifer: 8 / Drehwerk: 15
Betriebsdruck (bar): 350 Greifen / 140 Drehen

Schüttgewicht bis (t/m³): 2.0-2,6
Schließkraft max. (kN): 105
Drehzahl max. (U/min.): 15

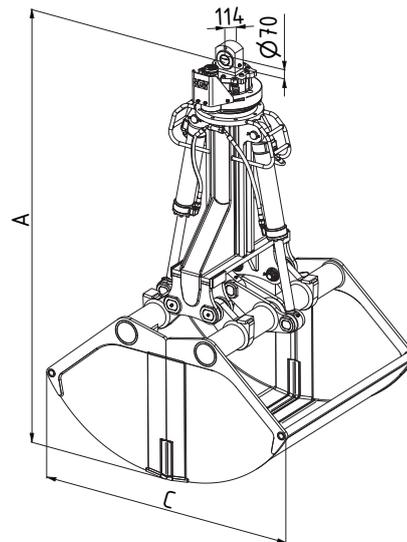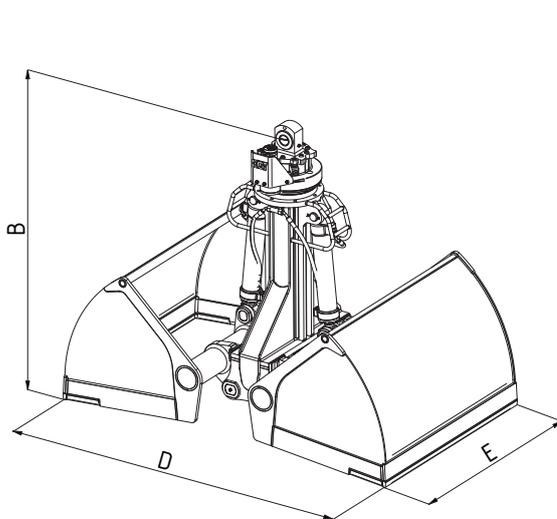

Typ	Inhalt - SAE (l)	Schüttgewicht (t/m ³)	Gewicht (kg)	Abmessungen (mm)				
				A	B	C	D	E
RCS5.6-1500	1500	2,6	2045	2908	1990	1979	2624	1200
RCS5.6-2000	2000	2,6	2220	2908	1990	1979	2624	1600
RCS5.6-2500	2500	2,0	2395	2908	1990	1979	2624	2000

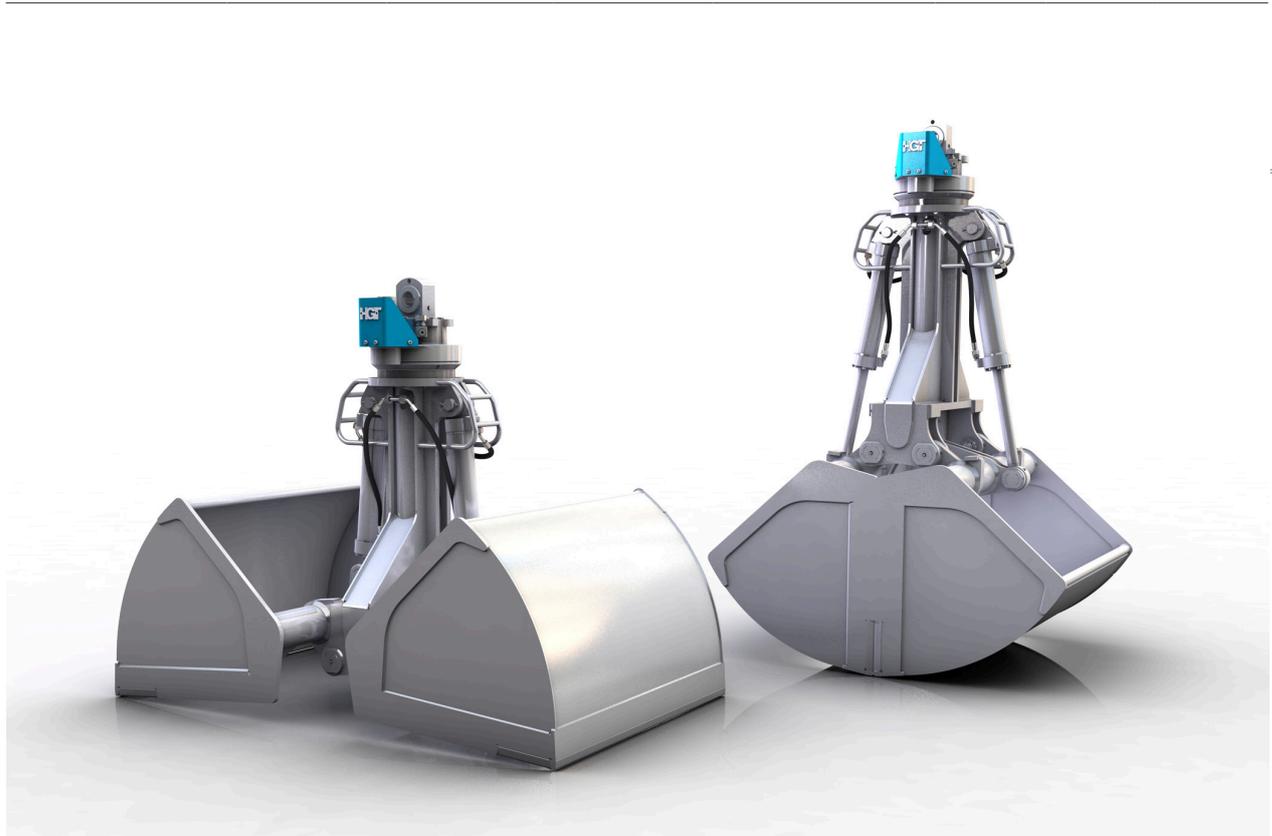

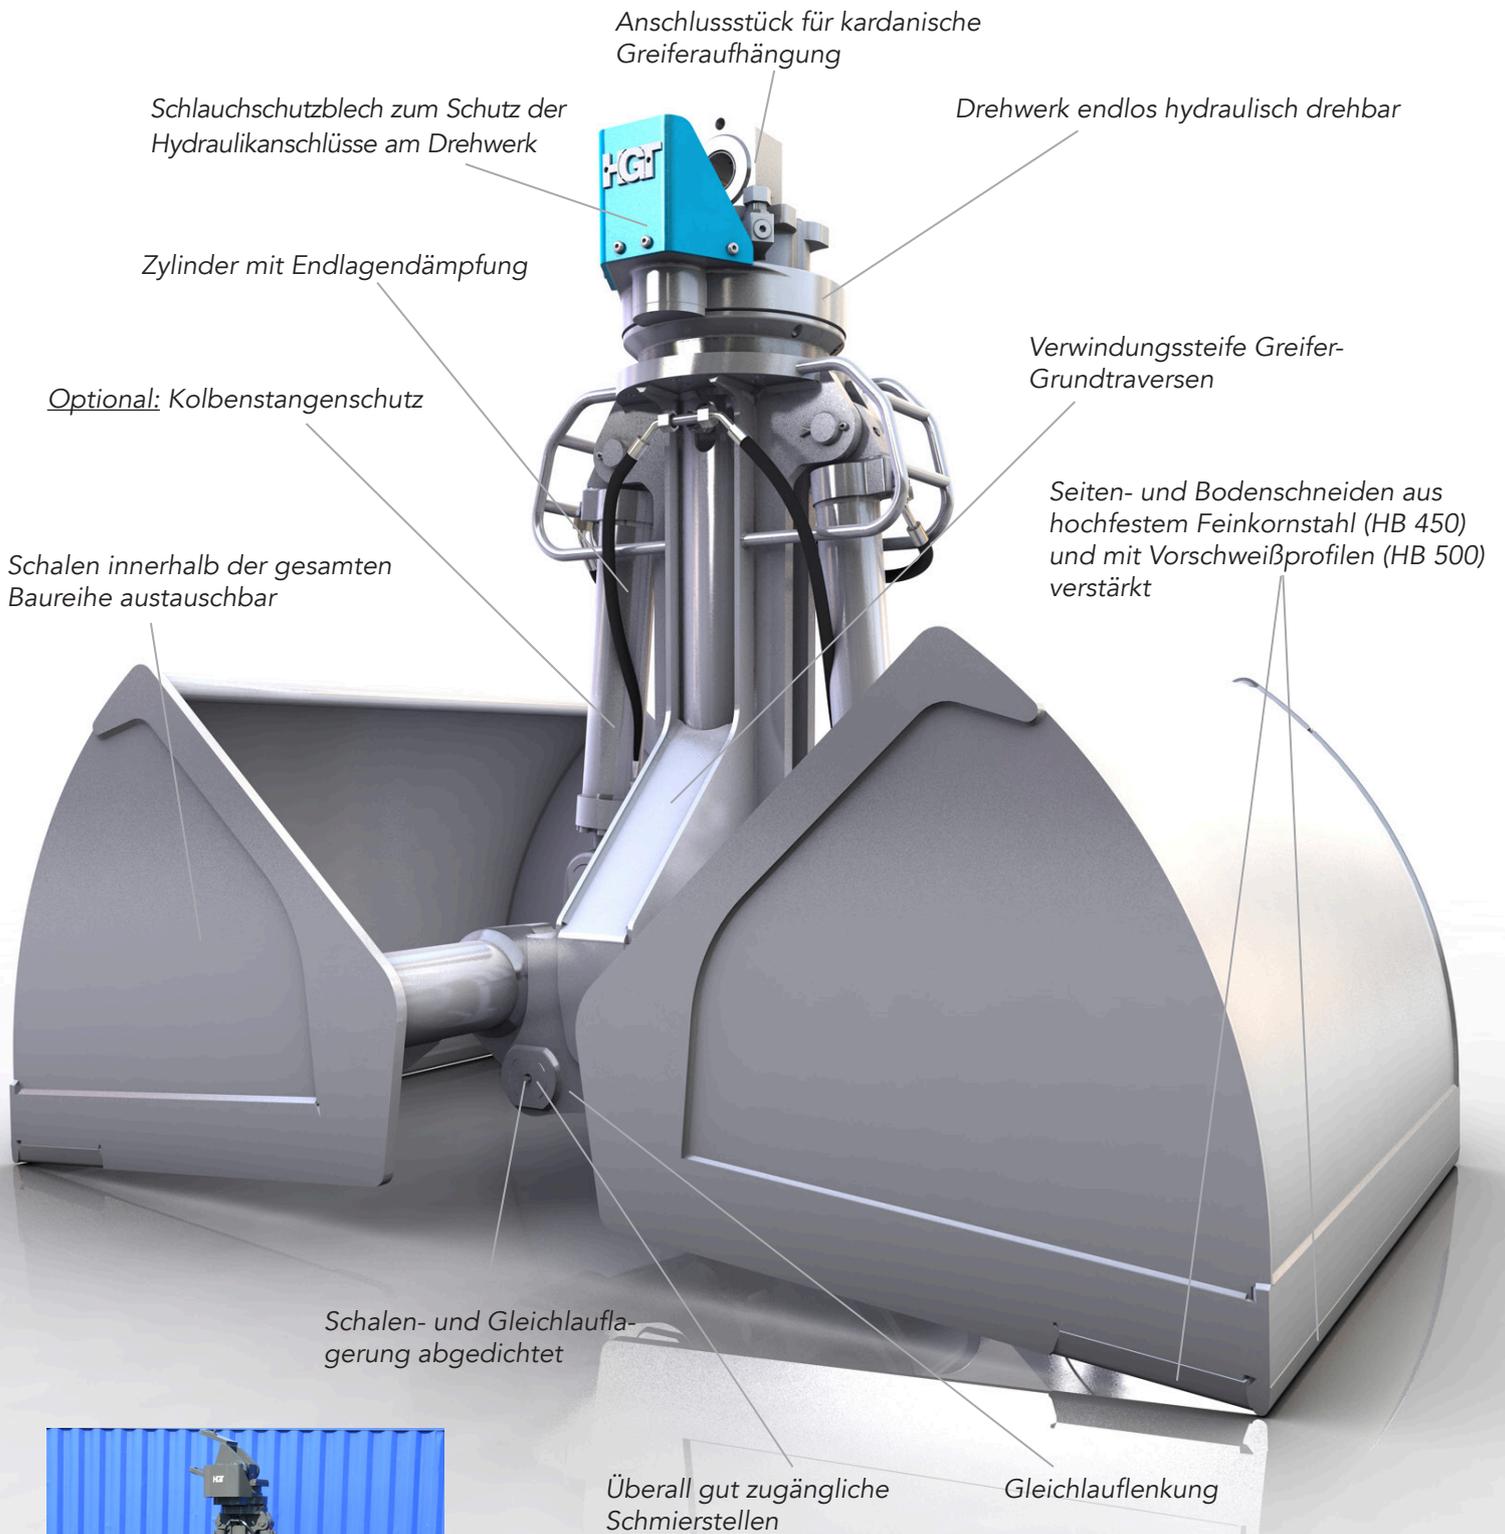

Optimierter Greifer für den Schüttgutumschlag, wie z.B.:
 Kies, Sand, Schotter, Getreide, Futtermittel, Dünger, Erze,
 Kohle usw.